

mbNET.go!

Manual

V 1.0.1 | from HW 00 | from FW 1.0.0 | en



MDH 3000



MDH 3300



MDH 3400



1 Technical Data

Release note (technical data)

Version	Date	Comment
V 1.0.0	June 6 th , 2026	Initial version for devices with hardware revision from HW 00 and firmware version from FW 1.0.0.
V 1.0.1	July 27 th , 2026	General corrections

Industrial router mbNET.go

MDH 3000, MDH 3300, MDH 3400 EU, MDH 3400 US

from hardware version: **HW 00** and firmware version **1.0.0**

You can find the device type and the hardware version on the device rating plate.

Housing dimensions

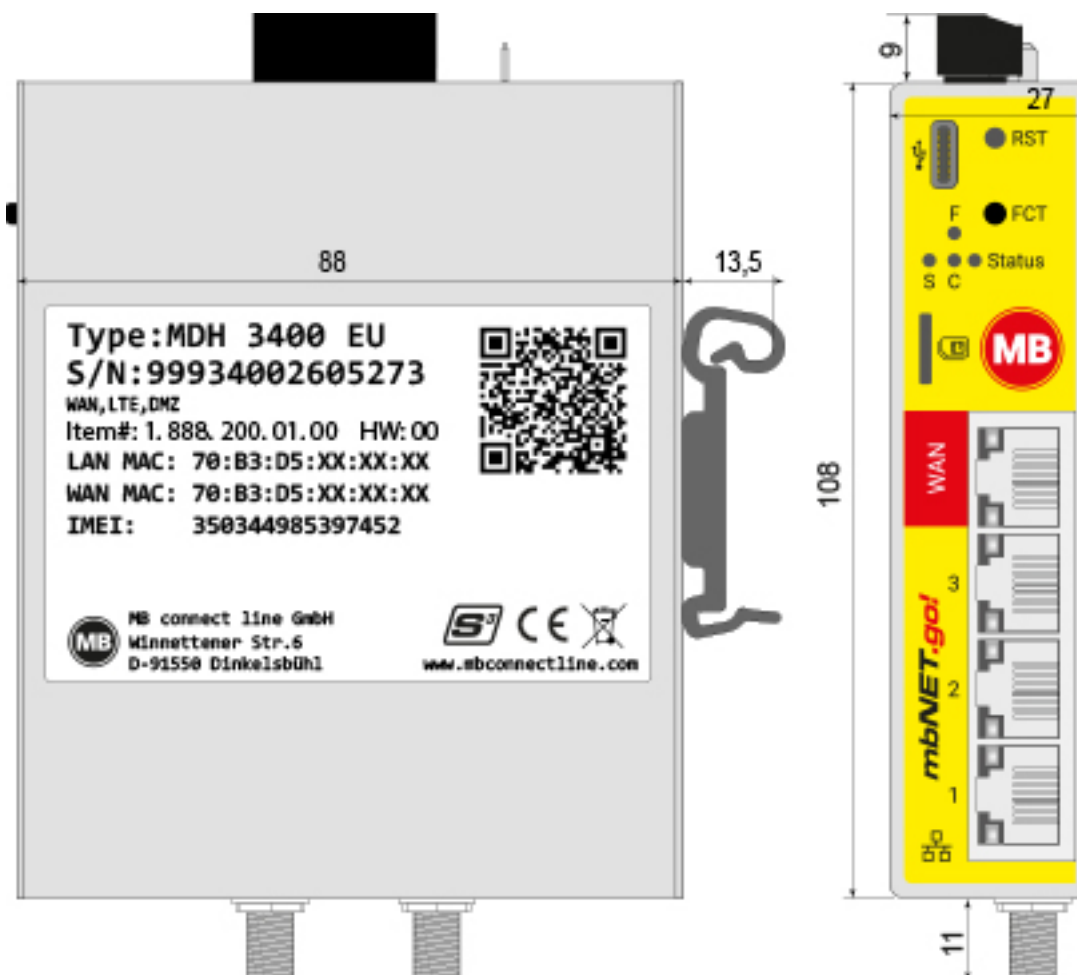


Image 1: Features and interfaces vary depending on the device type.


General data

Performance data	
Voltage --- V (DC)	10 – 30 V DC*
Current consumption	max. 500 mA @ 24 V
Power dissipation	max. 6 W
Random access memory	512 MB
eMMC storage	1 pc, 1 GB
Processor	ARM Cortex®-A55 1.7 GHz
IP Protection class	IP 30**
Area of use	Dry environment
Temperature (operating)	-40 – +75 °C
Temperature (storage)	-40 – +85 °C
Humidity	0 – 95% non-condensing
Real-time clock	In the event of a power failure, the date and time are maintained for up to 14 days (depending on the ambient temperature).
Dimensions (max.)	27 mm x 102 mm x 128 mm (W x D x H)
Weight (max.)	340 g
Housing/material	Metal
Installation	DIN-top hat rail mounting

* GND (-) is galvanically (low-impedance) connected to the device housing.
The RJ45 shields, the USB shield and the SMA outer conductors are also connected to GND.
The housing is earthed via the earth terminal.
Using a plastic DIN rail mount does not result in an automatic connection between the housing/GND and PE.

** At full occupancy of all connections and interfaces. Alternatively, unused interfaces can be covered with dust protection plugs.

I/Os and Standard interfaces



Terminal block on the top of the device (schematic diagram)

Digital input/output	2 pcs , I/Os (X1, X2) can be configured independently of one another as digital inputs or digital outputs. Digital input: 10 – 30 V DC (galvanically isolated), (Low 0 – 4 V DC, High 8 – 30 V DC) Digital output: 10–30 V DC (galvanically isolated), max. 1.5 A per output.
WAN interface*	1 pc , 10/100MBit/s full and half duplex operation, automatic detection patch cable / cross-over cable (auto detection).
LAN interface	3 pcs , 10/100MBit/s full and half duplex operation, automatic detection patch cable / cross-over cable (auto detection).
USB interface	1 pc , USB-C host

*The WAN interface can be used as a LAN interface via software configuration.

Optional interfaces

SIM card slot	1 pc, SIM card slot for für nano SIM („Push - Push“)
---------------	--

VPN

VPN protocol	OpenVPN, WireGuard (for portal connection only)
Encryption	AES (256/192/128: GCM/CBC/CFB/OFB), ARIA (256/192/128), Camellia (256/192/128), WireGuard: ChaCha20-Poly1305 (hard)
Hash/HMAC	SHA-2 (224/256/384/512, 512/224, 512/256), SHA-3 (224/256/384/512)
Authentication	X.509 certificates; OpenVPN with additional username/password (password, password-tls); WireGuard public-key pairs (+ optional PSK).

Network/security

Firewall	1:1 NAT, Netz-NAT, IP-Filter, Port-Forwarding, Stateful Inspection
IP router	NAT-IP/Masquerading, TCP/IP routing, IP forwarding
Services	DHCP client, NTP server, NTP client
Time levelling	via NTP server.

Communication

Devices with LTE (4G) module - EU (MDH 3400 EU) from HW 00

Target region*	EMEA
GSM/GPRS/EDGE	900 (B8), 1800 (B3) MHz; max. 236 kbps
HSxPA	900 (B8), 1800 (B3), 2100 (B1) MHz; Downlink max. 42 Mbps, Uplink max. 5,76 Mbps
LTE	800 (B20), 900 (B8), 1800 (B3), 2100 (B1), 2600 (B7), 700 (B28A) MHz; Downlink max. 150 Mbps, Uplink max. 50 Mbps

*Furthermore, the device can technically be operated in other countries.
Check the frequency bands used before connecting the device to the mobile network.

RF parameters	
Output power - typical values for max output level	Sensitivity - typical sensitivity levels
• 2G: LB: 33 dBm; HB: 30 dBm • 3G/TD-SCDMA: 24dBm • 4G (FDD & TDD): 23dBm @1RB	• -108 dBm @ 2G • -113.5 dBm @ 3G • -103 dBm @ 4G FDD (BW=5 MHz)
Antenna connector	2 pieces SMA socket 
TAC	35162610

Devices with LTE (4G) module – US (MDH 3400 US) from HW 00

NOTICE

Device type MDH 3400 US bears no CE marking and may not be used or put into operation in the European economic area (EEA)!

Target region*	North America (Public safety, AT&T, FirstNet, T-Mobile, Canada)
HSxPA	1900 PCS (B2), AWS (B4), 850 (B5) MHz; Downlink max. 42 Mbps
LTE	700 Lower (B12), 700 PS (B14), AWS (B4), 1900 PCS (B2), 850 (B5), 700 Upper (B13), AWS-3 (B66), 600 (B71) MHz; Downlink max. 150 Mbps, Uplink max. 50 Mbps

*The frequency bands used in the country of use vary depending on the provider.
Check the frequency bands used before connecting the device to the mobile network.

RF parameters	
Output power - typical values for max output level	Sensitivity - typical sensitivity levels
2G: LB: 33 dBm; HB: 30 dBm 3G/TD-SCDMA: 24dBm 4G (FDD & TDD): 23dBm @1RB	-108 dBm @ 2G -113.5 dBm @ 3G -103 dBm @ 4G FDD (BW=5 MHz)

Antenna connector	2 pieces SMA socket 
-------------------	---

TAC	35034498; 35432809; 35604311
FCC	Contains FCC ID: RI7LE910CxNF

Devices with Wi-Fi module (MDH 3300) from hardware version HW 00

Wi-Fi	IEEE 802.11b/g/n	
2.4 GHz Frequency Bands	EU: 2.4 GHz to 2.483 GHz FCC/ISED: 2.4 GHz to 2.473 GHz MIC: 2.4 GHz to 2.495 GHz RCM: 2.4 GHz to 2.483 GHz	
2.4 GHz Operating Channels (Wi-Fi)	EU: 13 (3 non-overlapping) FCC/ISED: 11 (3 non-overlapping) MIC: 14 (4 non-overlapping) RCM: 13 (3 non-overlapping)	
5 GHz Frequency Bands	EU 5.15 GHz to 5.35 GHz (Ch 36/40/44/48/52/56/60/64) 5.47 GHz to 5.725 GHz (Ch 100/104/108/112/116/120/124/128/132/136/140) 5.725 GHz to 5.85 GHz (Ch 149/153/157/161/165) FCC 5.15 GHz to 5.35 GHz (Ch 36/40/44/48/52/56/60/64) 5.47 GHz to 5.725 GHz (Ch 100/104/108/112/116/120/124/128/132/136/140/144) 5.725 GHz to 5.85 GHz (Ch 149/153/157/161/165) ISED 5.15 GHz to 5.35 GHz (Ch 36/40/44/48/52/56/60/64) 5.47 GHz to 5.725 GHz (Ch 100/104/108/112/116/132/136/140/144) 5.725 GHz to 5.85 GHz (Ch 149/153/157/161/165) MIC 5.15 GHz to 5.35 GHz (Ch 36/40/44/48/52/56/60/64) 5.47 GHz to 5.725 GHz (Ch 100/104/108/112/116/120/124/128/132/136/140) RCM 5.15 GHz to 5.35 GHz (Ch 36/40/44/48/52/56/60/64) 5.47 GHz to 5.725 GHz (Ch 100/104/108/112/116/132/136/140) 5.725 GHz to 5.85 GHz (Ch 149/153/157/161/165)	
5 GHz Operating Channels (Wi-Fi)	EU: 24 non-overlapping FCC: 25 non-overlapping ISED: 22 non-overlapping MIC: 19 non-overlapping RCM: 21 non-overlapping	
Data rates	802.11a	6 Mbps; 54 Mbps
	802.11b	1 Mbps; 11 Mbps
	802.11g	6 Mbps; 54 Mbps
	802.11n (2.4 GHz)	HT20; MCS0-7; HT40; MCS0-7
	802.11n (5 GHz)	HT20; MCS0-5; HT20; MCS6-7; HT40; MCS0-7
	802.11ac (5 GHz)	VHT20; MCS0-5; VHT20; MCS6-7 VHT20; MCS8; VHT40; MCS0-7; VHT40; MCS8-9; VHT80; MCS0-7; VHT80; MCS8-9
Hardware supported Encryptions/Decryption (Security)	• WEP • WPA, WPA2 Personal and Enterprise, and WPA3 Personal and Enterprise support for powerful encryption and authentication. • AES and TKIP in hardware for faster data encryption and IEEE 802.11i compatibility. • Reference WLAN subsystem provides Wi-Fi Protected Setup (WPS). • CKIP	

Max. output power	16.5 dBm (44.7 mW)
Max. sensitivity	-96 dBm (PER < 8%)

Regulatory certifications

Country/Region	Regulatory ID
USA (FCC)	SQG-LWB5PLUS
EU	N/A
Canada (ISED)	3147A-LWB5PLUS
Japan (MIC)	201-200402
Australia	N/A
New Zealand	N/A

Installation position/minimum distances

The router is designed to be mounted on DIN top hat rails (in accordance with DIN EN 50 022) and for installation in a control cabinet.


The router is designed exclusively for use in the control cabinet in accordance with DIN EN IEC 62368-1 VDE 0868-1:2021-05.

The installation and assembly must be carried out according to IEC 60364-1; VDE 0100-100.

The router may be only mounted vertically as described.

NOTICE

Non-compliance with the minimum distances can destroy the device at high ambient temperatures!

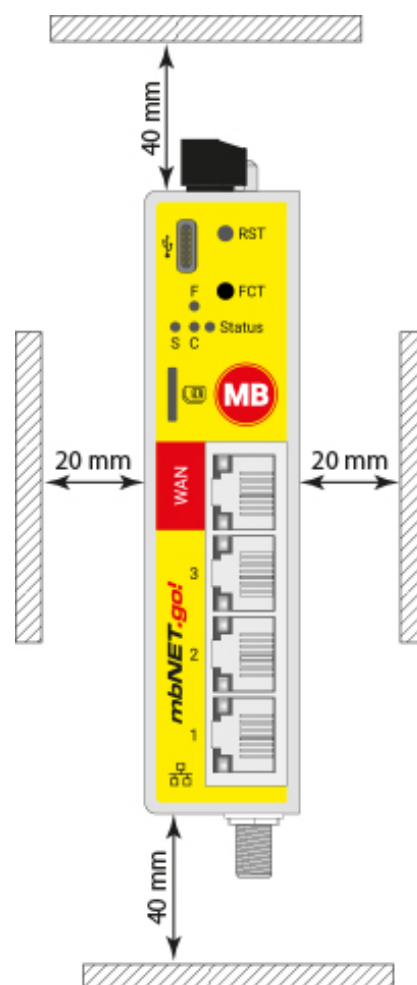

Markings/Listings/Certifications



Certificates (CE, etc.) can be downloaded at www.mbconnectline.com.

SIMPLIFIED EU DECLARATION OF CONFORMITY

MB connect line GmbH hereby declares that the radio system types MDH 3300 and MDH 3400 EU comply with Directive 2014/53/EU.

A copy of the EU declaration of conformity is available at the following Internet address:

<https://mbconnectline.com/conformity/>

Issued by:

MB connect line GmbH

Winnettener Str. 6
91550 Dinkelsbühl
GERMANY

Phone +49 (0) 98 51 / 58 25 29 0
Mail info@mbconnectline.com
Web www.mbconnectline.com

Great care was taken in compiling the texts and illustrations.

Despite all efforts, mistakes can never be completely avoided. We are always grateful for suggestions for improvement and / or references to errors.

Current manuals and other information

The latest manuals and further information on products for secure remote maintenance can be found in the download portal at www.mbconnectline.com